


利用uPD78F9116和低价的TRIAC器件控制马达的设计示意图

Figure 4-2: μ PD78F9116 Schematic Diagram

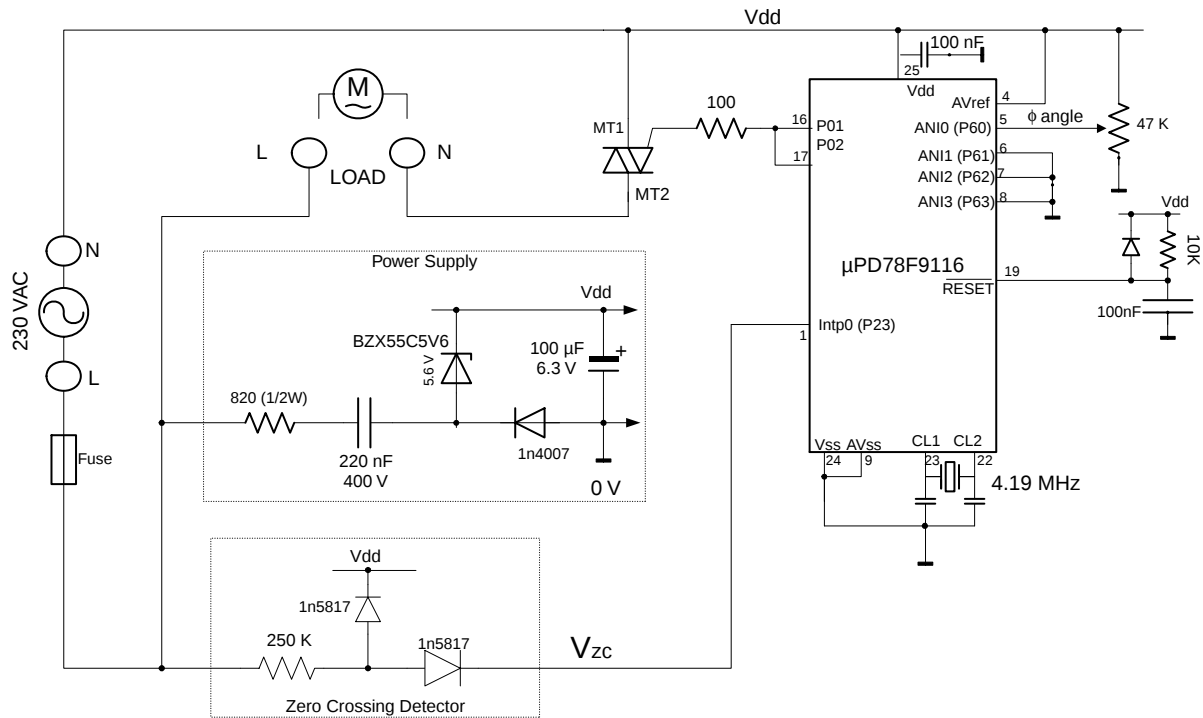

Remark: All other Microcontroller I/O pins are set to Output.

4.2 Device Configurations

The configuration and operating environment for both low cost members of the 8-bit Microcontroller family, is essentially the same. The exact configurations are shown below.

Table 4-1: Device Configurations

	μPD78F0103	μPD78F9116
Operating clock	4.19 MHz	4.19 MHz
Operating Voltage	5 V	5 V
Internal ROM	24 Kbytes	16 Kbytes
Internal RAM	768 bytes	256 bytes