

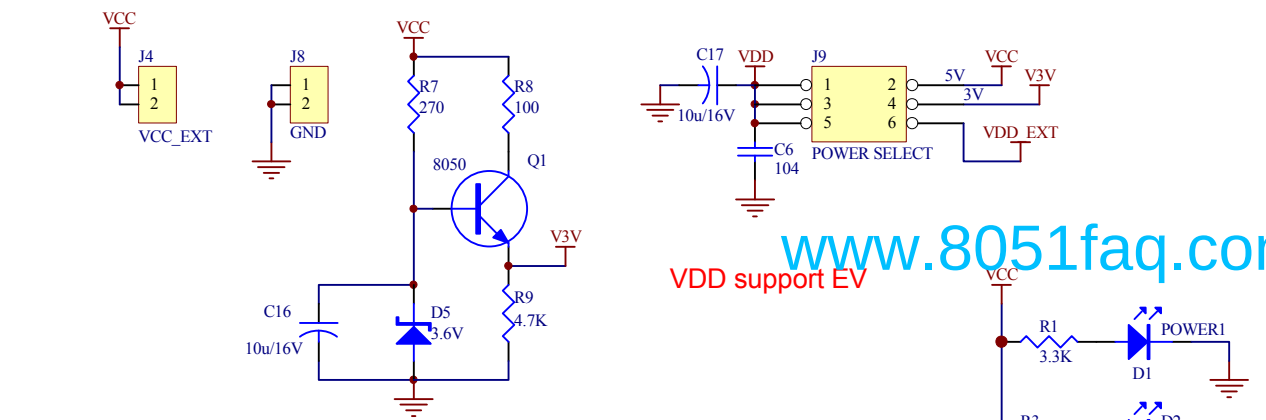
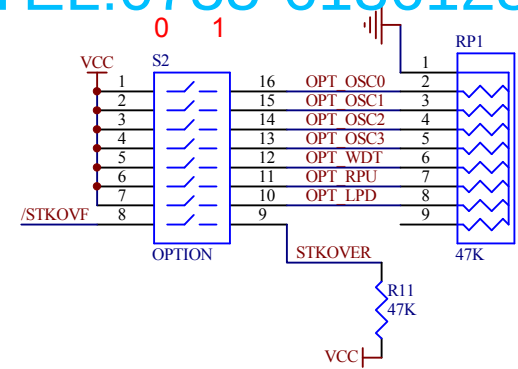

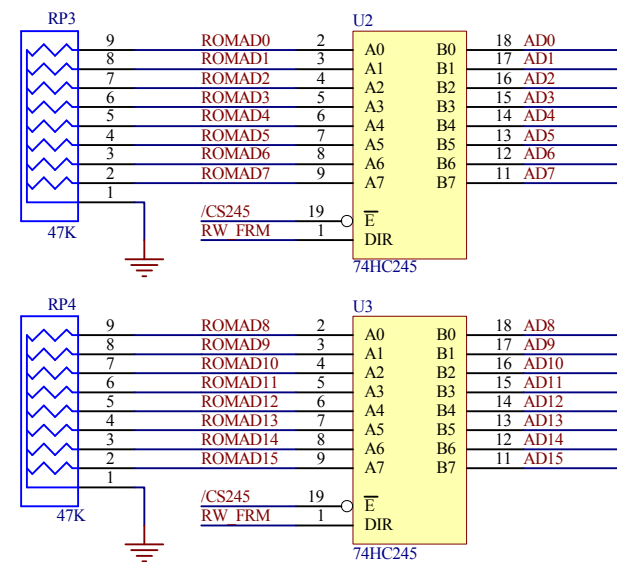
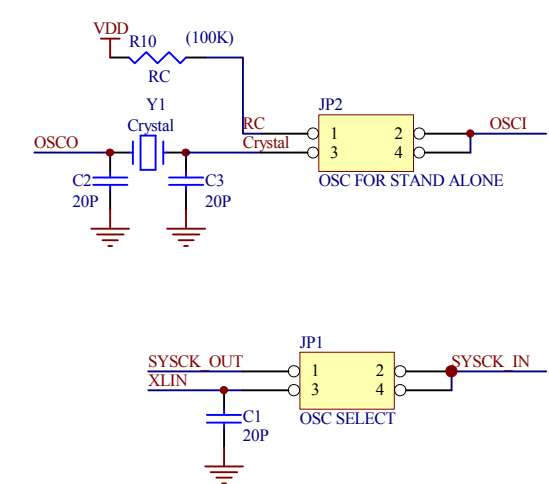
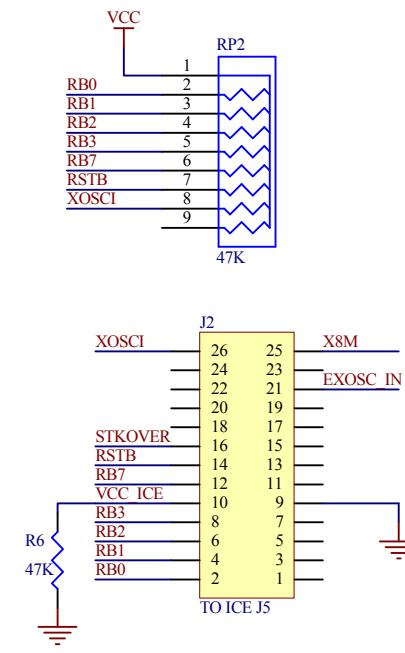
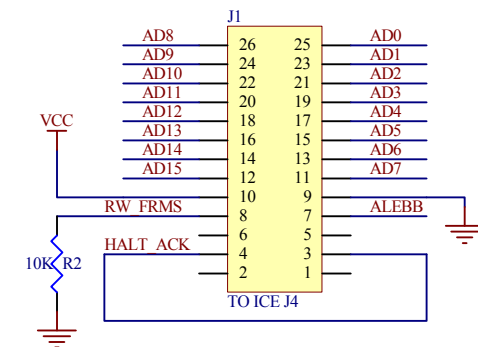


www.8051faq.com.cn TEL:0755-61361234

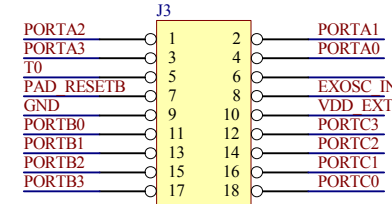

OPT_OSC2, OSC1, OSC0			
0	0	0	External Clock
1	0	0	RC
1	1	0	X'TAL 400K~4M
1	0	1	Ceramic
1	1	1	X'TAL 32.768K
OPT_OSC3: (RC type)	0	Normal RC	
	1	Ring RC	
OPT_WDT: (Watch dog)	0	Disable	
	1	Enable	
OPT_RPU: (I/O pull up resistor)	0	Under 5V VDD	
	1	Under 3V VDD	
OPT_LPD: (Low Power Detect)	0	LPD off	
	1	LPD on	
STKOVER: (Stacker overflow)	0	Disable	
	1	Enable	

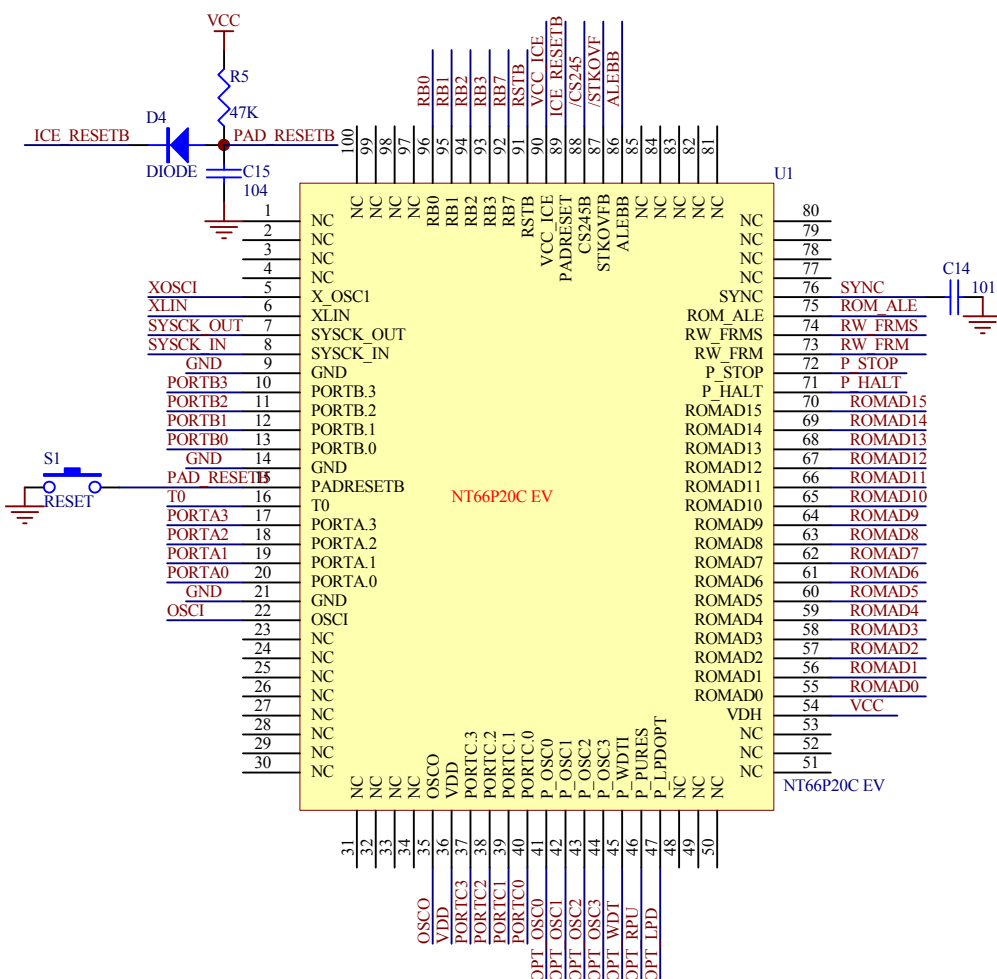

INTERFACE TO EPROM BOARD

